




Wrist Tool Lanyard (D Ring) Velcro Fastening

The (D Ring) velcro fastening wrist tool lanyard made by Leading Edge in the UK features a captive D ring for simple direct tool attachment using a connector. The design has a unique safety release feature using an expansion link which prevents de-gloving in an accident. Wrist lanyards provide a direct hand to tool positive configuration. All Leading Edge wrist lanyards have a unique safety release expansion joint, preventing de-gloving in an accident. The design makes it possible for the wrist strap to come free in an emergency releasing the hand from becoming drawn into potential hazards should their tool/lanyard become caught up, as an example in rotating machinery. The expansion joint is available in two options i.e. full expansion and a half expansion joint.

FEATURES

- This wrist lanyard is fitted with a very secure rated Velcro fastening system, allowing faster adjustment and is simpler to put-on and take-off when using multiple pre-tethered tools.
- The Velcro is manufactured from industrial grade synthetic Polyester, and has a water and UV resistant structure that does not fade and weaken if maintained in-line with our care instructions
- The wrist tool lanyards are available in a choice of two safety release expansion joint configurations to suit both application and risk of exposure to de-gloving in an accident.
- The expansion joint also provides additional user wearing comfort and flexibility
- The (Full) expansion joint option is a 8cm link that expands to 17cms (112% stretch) suitable for tools up to 2kgs and where this is a risk of lanyard being caught in rotating machinery. The full expansion joint allows the hand to be pulled free very quickly
- The (Half) expansion joint option is a 5cm link that expands to 9cms (80% stretch) suitable for tools up to 5kgs allows hand to be pulled free should the lanyard become trapped (not for use with rotating machinery which may require a faster release). The half expansion joint has better wear characteristics
- Supplied with Aluminium D-ring (c/w reinforced eye)
- Configured to allow fitting and adjustment with only one hand operation
- Designed to be suitable for all-day intensive wearing (comfortable and lightweight)
- Individually serialised for clear easy inspection, full traceability and control
- Issued with a 'Declaration of Conformity' product certificate and 'Final Inspection' sheet
- Lanyard weight: 0.02kgs (without connectors)
- Rated for hand tools up to 5kgs (Dynamically tested - see 'testing pages' for more info). Rating using a 2:1 safety factor
- Electrical Conductivity and Resistivity Test*: Dry >200 Giga-ohms / Wet >4 Mega-ohms *Wiring regulations (BS7671). Live working hand tools (EN 60900)
- Wrist lanyard made from premium polyester webbing, industrial grade elastic tape, aluminium D-ring, marine grade buckle, finished to a high standard
- Manufactured at our height safety product factory in the UK

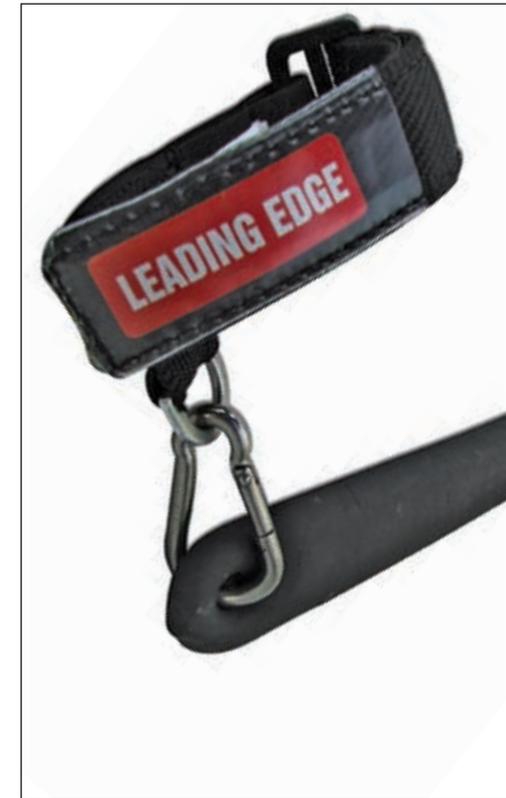

Code	Expansion Joint	Description
TWLDK	Full Expansion	Supplied with Karabiner
TWLDM	Full Expansion	Supplied with Mallion
TWLDP	Full Expansion	Supplied with (Plain) No Connectors
WTLDVHALFK	Half Expansion	Supplied with Karabiner
WTLDVHALFM	Half Expansion	Supplied with Mallion
WTLDVHALFP	Half Expansion	Supplied with (Plain) No Connectors